		JCS
ន		520
7		c
2		'n
=	2	7
		₹7

lease type a plus sign (+) inside this box →		Patent and Trademan	k Office: U.S.	PTO/SB/05 (4/9 gh 09/30/2000. OMB 0651-003 DEPARTMENT OF COMMERC	32 CE
	to respond to a collection of information unless it displays a valid OMB control number.  **Attorney Docket No.** RCA89548				
UTILITY					
PATENT APPLICATION	First Inventor or Application Identifier Scott Klopfenstein  Title A System for Acquiring and Processing*				
TRANSMITTAL	7.00		9512659U		_
(Only for new nonprovisional applications under 37 C.F.A. § 1.53(b),	Express Mail				_
APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	,	ADDRESS (O: 8	Assistant Con Box Patent Ap Vashington, I		
Fee Transmittal Form (e.g., PTO/SB/17)  (Submit an original and a duplicate for fee processing)	5.			ram (Appendix)	
2. X Specification [Total Pages 23		Nucleotide and/or A		equence Submission	
(preferred arrangement set forth below)  - Descriptive title of the Invention	_		iter Readabl	e Copy	
- Cross References to Related Applications		b. Paper	Conv (identic	cal to computer copy)	
- Statement Regarding Fed sponsored R & D		=		identity of above copies	
Reference to Microfiche Appendix     Background of the Invention	_			<u> </u>	_
Brief Summary of the Invention				ICATION PARTS	_
- Brief Description of the Drawings (if filed)	7.			sheet & document(s))	
- Detailed Description	8.	37 C.F.R.§3.7 (when there is			
- Claim(s)	9.	English Trans	lation Docum	nent (if applicable)	
- Abstract of the Disclosure 3. X Drawing(s) (35 U.S.C. 113) [Total Sheets 8	7, 10,	Information Di		Copies of IDS	
	<b>ਜ</b> , ਜ਼ਿੰ	Statement (ID		9 Citations	
	Date Operation (ADED 5/3)				
a. X Newly executed (original or copy)		12. X (Should be specifically itemized)			
<ul> <li>Copy from a prior application (37 C.F.R. § (for continuation/divisional with Box 16 complete</li> </ul>	1.63(d)) od) 13.[	Statement fied in prior applications			
DELETION OF INVENTOR(S)	1 '	(PTO/SB/09-12) Status still proper and desired			
" L Signed statement attached deleti inventor(s) named in the prior appli		14. Certified Copy of Priority Document(s) (if foreign priority is claimed)			
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).					
"NOTE FOR ITEMS 1.4 13: IN ORDER TO BE ENTITLED TO PAY SMALL FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), E	ENTITY EXCEPT				
FEES, A SMALL ENTITY STATEMENT IS REQUIRED OF C.F.R. § 1.27), EXCEPT  IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON OF C.F.R. § 1.28).					
16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a praliminary amendment:  Continuation Divisional Continuation-in-part (CIP) of prior application No:/					
Ories emplication information: Examiner		Group /	Art Unit:		
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by					
reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.					
17. CORRESP	ONDENCE A	ADDRESS			_
Customer Number or Bar Code Label		or	☐ Corr	espondence address below	
(Insert Customer No	o. or Attach bar o	ode label here)			_
Joseph S. Tripoli					_
Thomson Multimedia Licensi	ng Inc.				_
Address Patent Operation					_
Two Independence Way, P. O					_
City	eta :	NJ	Zip Code Fax	08543-5312	_
Country USA Telephon	ne [609	/734-		609/734-9700	_
Name (Print/Type) Alexander J. Burke		Registration No. (Atto	mey/Agent)	40,425	l
Signature Abutule Buli			Date	16 February 2000	)
Burden Hour Statement: This form is estimated to take 0.2 hours	to complete. To s form should be	ime will vary depending sent to the Chief Info	g upon the ne	egs of the individual case. A er, Patent and Trademark Off	Any ice.

comments on the amount of time you are required to complete his form should be sent to the Chem immention Officer, Patent and Trademark Washington, Dc 2023.10 DN OTS SEND FEES ON COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assignant Communisories for Patents. Box Patent Application, Washington, DC 2023.1

\*\*BToadCast \* Programs\*\*, Program\*\* Guide and Channel Identification Data

1

# A System for Acquiring and Processing Broadcast Programs, Program Guide and Channel Identification Data

This is a non-provisional application of provisional application serial No. 60/135,857 by S. Klopfenstein, filed May 25, 1999.

## Field of the Invention

This invention is related to the processing of broadcast Program Guides, system information and program specific information.

# Background of the Invention

In video broadcast and processing applications, digital video data is typically encoded to conform to the requirements of a known standard. One such widely adopted standard is the MPEG2 (Moving Pictures Expert Group) image encoding standard, hereinafter referred to as the "MPEG standard". The MPEG standard is comprised of a system encoding section (ISO/IEC 13818-1, 10th June 1994) and a video encoding section (ISO/IEC 13818-2, 20th January 1995). Data encoded to the MPEG standard is in the form of a packetized datastream which typically includes the data content of many program channels (e.g. content corresponding to cable television channels 1-125). Further, several digital services and channels may occupy the frequency spectrum previously occupied by a single analog channel. A 6 MHz bandwidth previously allocated to an analog NTSC compatible broadcast channel may now be split into a number of digital sub-channels offering a variety of services. For example, the broadcast spectrum for RF channel 13 may be allocated to sub-channels including a main program channel, a financial service channel offering stock quotes, a sports news service channel and a shopping and interactive channel. In addition, data conveyed in different sub-channels may be in different data formats (e.g. analog, digital etc.). Further, both the quantity of subchannels transmitted and the individual sub-channel bandwidth may be changed dynamically to accommodate changing broadcast programming requirements.

In such a digital video system the proliferation in the quantity of services being broadcast and the increased variety of their content, as well as the ability of a broadcaster to dynamically vary the number and allocated bandwidth of these channels poses a number of problems. Specifically, the increase in the quantity

of broadcast channels may increase the difficulty of tuning and lengthen the time required to acquire a selected program channel. Further, as the quantity of channels increases, so does the quantity of ancillary program specific information required in decoding the transmitted program data. The ancillary program specific information includes data used in identifying and assembling packets comprising selected programs and also includes program guide and text information associated with the transmitted program data. The acquisition and management of ancillary program specific information required to receive and decode programs and the management of channel numbering in a digital video system poses additional problems. These problems and derivative problems are addressed by a system according to the invention principles.

## Summary of the Invention

A system for acquiring program guide information conveyed on one of a plurality of broadcast channels involves identifying an individual broadcast channel in response to user entry of either of, (a) a first channel identification number (e.g. a virtual channel identification number) and (b) a different second channel identification number (e.g. a transmission channel identification number). The system is tuned to receive the identified individual broadcast channel and packetized program information is acquired comprising a program conveyed on the individual broadcast channel using an acquired program guide. The packetized program information is processed to be suitable for display. The system also supports navigating within a first list of broadcast channels and a second list of sub-channels associated with individual broadcast channels in response to user activation of first and second navigation controls respectively.

## Brief Description of the Drawings

In the drawing:

Figure 1 is a block diagram of digital video receiving apparatus for processing broadcast signals, according to the principles of the invention.

Figure 2 shows a flowchart of a method for acquiring program guide information conveyed on a transmission channel conveying a user selected broadcast channel and for identifying and associating an individual broadcast channel with a

specific program guide, according to the invention.

Figure 3 shows a flowchart of a decoder initialization method for scanning through received terrestrial broadcast channels to associate individual terrestrial broadcast channels with corresponding program guides, according to the invention

Figure 4 shows a flowchart of a decoder initialization method for scanning through received cable broadcast channels to associate individual cable broadcast channels with corresponding program guides, according to the invention.

Figure 5 shows a flowchart of a method for determining program guide availability on a broadcast channel in response to User entry of a channel identification number or in response to the addition of a new channel to a decoder channel line-up, for example, according to the invention.

Figure 6 shows a flowchart of a method involving channel number mapping for processing program content data and channel identification numbers to provide a composite image for display, according to the invention.

Figures 7 and 8 show examples of decoder tuning based on channel mapping for an MPEG PSI program guide and an ATSC PSIP compatible program guide respectively, according to the invention.

Figure 9 shows a flowchart for a method for acquiring program content data in response to User channel selection via navigation through hierarchically associated channel lists, according to the invention.

Figure 10 shows an exemplary program guide display including hierarchically associated channel lists and associated menu navigation controls, according to the invention.

#### Detailed Description of the Drawings

Figure 1 is a block diagram of digital video receiving apparatus for processing broadcast signals. The disclosed system involves processing video signals

incorporating ancillary program specific information including program guide data in different encoding formats. These may include, for example, MPEG PSI format compatible with the Program Specific Information (PSI) requirements specified in section 2.4.4 of the MPEG systems standard, or it may comply with the Program and System Information Protocol for Terrestrial Broadcast and Cable, published by the Advanced Television Systems Committee (ATSC), 10 November 1997, hereinafter referred to as the PSIP standard. The data formats may also include analog NTSC type video signal formats conveying program specific information in a vertical blanking interval (VBI) or proprietary and other data formats.

In a digital video system, an individual channel may be specified by a physical transmission channel (PTC) number determining the carrier frequency of transmission of the channel. An individual channel may also be specified by first and second identification numbers. The first identification number (a major number) is associated with an information provider. The second identification number (a minor number), is used in identifying a broadcast channel from among a group of channels associated with the first identification number. The first and second identification numbers in conjunction, are used in identifying data constituting a program transmitted on the broadcast channel. An exemplary range for a major number is from 1-99 for terrestrial broadcast channels and from 1-999 for cable channels. An exemplary range for a minor number is from 1-999 for both terrestrial and cable channels. A broadcast channel determined from major and minor numbers may alternatively be termed a service or a virtual channel or a logical channel. In a disclosed embodiment, upon system initialization, channel scanning is advantageously performed to associate a particular program guide (e.g. either a PSIP guide, MPEG PSI guide or an analog VBI guide) to an individual channel. A similar procedure is also performed upon introduction of a new channel. Further, the decoder advantageously translates a User entered PTC number into a combination majorminor number for display.

The principles of the invention may be applied to terrestrial, cable, satellite, Internet or computer network broadcast systems employing different coding types or modulation formats. Such systems may include, for example, non-MPEG compatible systems, involving other types of encoded datastreams and other methods of conveying program specific information. Further, although the disclosed system is described as processing broadcast programs, this is exemplary only. The term 'program' is used to represent any form of packetized data such as audio data, telephone messages, computer programs, Internet data or other communications, for

example.

In the video receiver system of Figure 1 (system 20), a terrestrial broadcast carrier modulated with signals carrying audio, video and associated data representing broadcast program content is received by antenna 10 and processed by unit 13. The resultant digital output signal is demodulated by demodulator 15. The demodulated output from unit 15 is trellis decoded, mapped into byte length data segments, deinterleaved and Reed-Solomon error corrected by decoder 17. The corrected output data from unit 17 is in the form of an MPEG compatible transport datastream containing program representative multiplexed audio, video and data components. The transport stream from unit 17 is demultiplexed into audio, video and data components by unit 22 which are further processed by the other elements of decoder system 100. These other elements include video decoder 25, audio processor 35, sub-picture processor 30, on-screen graphics display generator (OSD) 37, multiplexer 40, NTSC encoder 45 and storage interface 95. In one mode, decoder 100 provides MPEG decoded data for display and audio reproduction on units 50 and 55 respectively. In another mode, the transport stream from unit 17 is processed by decoder 100 to provide an MPEG compatible datastream for storage on storage medium 98 via storage device 90. In an analog video signal processing mode, unit 19 processes a received video signal from unit 17 to provide an NTSC compatible signal for display and audio reproduction on units 50 and 55 respectively.

In other input data modes, units 72, 74 and 78 provide interfaces for Internet streamed video and audio data from telephone line 18, satellite data from feed line 11 and cable video from cable line 14 respectively. The processed data from units 72, 74 and 78 is appropriately decoded by unit 17 and is provided to decoder 100 for further processing in similar fashion to that described in connection with the terrestrial broadcast input via antenna 10.

A user selects for viewing either a TV channel or an on-screen menu, such as a program guide, by using a remote control unit 70. Processor 60 uses the selection information provided from remote control unit 70 via interface 65 to appropriately configure the elements of Figure 1 to receive a desired program channel for viewing. Processor 60 comprises processor 62 and controller 64. Unit 62 processes (i.e. parses, collates and assembles) program specific information including program guide and system information and controller 64 performs the remaining control functions required in operating decoder 100. Although the functions of unit 60 may be implemented as separate elements 62 and 64 as depicted in Figure 1, they may alternatively be implemented within a single processor. For example, the

functions of units 62 and 64 may be incorporated within the programmed instructions of a microprocessor. Processor 60 configures processor 13, demodulator 15, decoder 17 and decoder system 100 to demodulate and decode the input signal format and coding type. Units 13, 15, 17 and sub-units within decoder 100 are individually configured for the input signal type by processor 60 setting control register values within these elements using a bi-directional data and control signal bus C.

The transport stream provided to decoder 100 comprises data packets containing program channel data and program specific information. Unit 22 directs the program specific information packets to processor 60 which parses, collates and assembles this information into hierarchically arranged tables. Individual data packets comprising the User selected program channel are identified and assembled using the assembled program specific information. The program specific information contains conditional access, network information and identification and linking data enabling the system of Figure 1 to tune to a desired channel and assemble data packets to form complete programs. The program specific information also contains ancillary program guide information (e.g. an Electronic Program Guide - EPG) and descriptive text related to the broadcast programs as well as data supporting the identification and assembly of this ancillary information.

In acquiring program guide information, decoder 100 (with processor 60) determines whether a received signal represents an analog or digital channel and also determines the type of program guide information available on the received channel. An analog channel VBI guide or a digital program guide (an MPEG PSI type guide or an ATSC PSIP type guide, for example) may then be subsequently acquired. Upon determining whether a PSIP, MPEG PSI, or VBI guide is present for a broadcast channel, or whether the broadcast channel is an analog channel with no VBI guide, decoder 100 (with unit 60) updates stored database information to associate one of the guides with the desired broadcast channel.

The different types of program specific information and program guides (e.g. PSIP, MPEG PSI, or VBI guide) are acquired and assembled by processor 60 to form their respective data structures. Processor 60 assembles a digital ATSC PSIP guide (and also an MPEG PSI guide), for example, into multiple hierarchically arranged and inter-linked tables. Similarly, processor 60 assembles analog VBI data to form a program guide database for use in performing program related decoder functions (e.g. time shifted program recording) and a guide for display in accordance with the system requirements.

An exemplary hierarchical PSIP table arrangement includes a Master

Guide Table (MGT), a Channel Information Table (CIT), Event Information Tables (EITs) and optional tables such as Extended Text Tables (ETTs). The MGT contains information for acquiring program specific information conveyed in other tables such as identifiers for identifying data packets associated with the other tables. The CIT contains information for tuning and navigation to receive a User selected program channel. The EIT contains descriptive lists of programs (events) receivable on the channels listed in the CIT. The ETT contains text messages describing programs and program channels. Additional program specific information describing and supplementing items within the hierarchical tables is conveyed within descriptor information elements. The resulting program specific information data structure formed by processor 60 via unit 22 is stored within internal memory of unit 60.

If the acquired program specific information is conveyed in MPEG PSI format it is similarly formed into tables in accordance with the MPEG systems standard section 2.4.4. These tables may include a Program Association Table (PAT), a Program Map Table (PMT), and may also include a Network Information Table (NIT) and a Conditional Access Table (CAT). Each table is formed from data packets that are recognized by a particular PID. The PMT defines the PID labels that identify the individual packetized datastreams that constitute a program. These individual streams are termed elementary streams. Elementary streams include datastreams such as a video datastream and individual audio datastreams for various languages as well as caption datastreams. The PAT associates a program number with the PIDs that permit identification and assembly of the packets comprising the PMT. The NIT is optional and may be structured and used to define physical network parameters such as satellite transmission channel frequencies and transponder channels, for example. The CAT contains the conditional access information such as encryption codes that govern access to programs that are dependent upon user entitlement.

Figures 2-5 show methods employed by processor 60 in controlling the decoder of Figure 1 in acquiring different types of program guide information (e.g. analog-VBI type, MPEG PSI type or ATSC PSIP type) conveyed on multiple broadcast channels for use in capturing packetized program information comprising a program conveyed on an individual broadcast channel. Specifically, Figure 2 shows a flowchart of a method for acquiring program guide information and for identifying and associating an individual broadcast channel with a specific program guide. This advantageously reduces the need to search for a guide to be used in processing a future selected broadcast channel and reduces program and channel acquisition times. In step 105, following the start at step 100, processor 60 directs system 20 to tune to

receive a physical transmission channel (PTC) conveying a user selected broadcast channel. If the received broadcast channel is digital, processor 60, in step 110, examines the data received on the channel to identify which program guides are available by looking firstly for a PSIP type of guide and then an MPEG PSI type of guide. If the received broadcast channel is analog (e.g. NTSC compatible), processor 60, in step 110, parses any data conveyed in the vertical blanking interval (VBI) of the analog signal to identify whether one or more program guides are available. In the event that both a PSIP guide and an MPEG PSI guide are available, processor 60 in step 115, selects a PSIP guide (designated as the highest priority guide) for acquisition and updates an internal database to associate the received broadcast channel with the selected PSIP guide. The PSIP guide is selected as the highest priority guide in accordance with a predetermined guide priority profile. In step 120, processor 60, in conjunction with demultiplexer 22, acquires PSIP data packets and assembles them to form a PSIP guide data structure within the unit 60 internal memory.

In an alternative embodiment, multiple guides (e.g. a PSIP and an MPEG PSI guide) may be acquired and assembled. The multiple guides may be compared and used by processor 60 to identify errors in the guide data or to identify additional broadcast services that are listed in one guide and omitted in another. Thereby, processor 60 may add such additional services to a user's service list by capture of data supporting user access to these services. In step 125, processor 60 parses the captured PSIP guide data to derive information supporting generation of a displayed program guide listing. The displayed program guide shows a user the programs and events and associated scheduled broadcast times available on the received physical transmission channel (PTC). Processor 60 in conjunction with decoder 100 processes the parsed information and presents the program guide listing display on reproduction device 50. The displayed program guide lists programs for the received transmission channel and the other available channels. In step 130, processor 60 uses the acquired PSIP guide data in directing decoder 100 in the capture and assembly of packetized data to form a program being broadcast on the user selected broadcast channel. The process of Figure 2 terminates at step 135.

Figure 3 shows a flowchart of an initialization method employed by processor 60 and decoder 100 involving iterative scanning through received terrestrial broadcast channels to associate individual terrestrial broadcast channels with corresponding program guides. Such an initialization method may be performed at power-on, or during low use periods (e.g. during the night) or during a background

operation that is invisible to a User, for example. However, this type of scanning operation may not identify guides available for a newly added broadcast channel. Following the start at step 200, processor 60, in step 205, directs system 20 (the Figure 1 decoder) to tune to receive a next available terrestrial broadcast channel using previously stored physical transmission channel (PTC) tuning information. Further, processor 60, in step 210, directs system 20 to attempt to acquire a digital PSIP guide conveyed on this terrestrial broadcast channel. If processor 60 is successful, it stores the PSIP guide in internal memory and updates an internal database to associate this particular received channel as a PSIP guide type channel (steps 215 and 220 respectively). If acquisition of a PSIP guide was unsuccessful in step 215, processor 60 determines if the received broadcast channel is analog and if so acquires a program guide conveyed in VBI data (if available) in steps 225 and 230 respectively. If the received broadcast channel is not analog (step 225), processor 60 attempts to acquire a digital MPEG PSI guide comprising a program map table and a program association table (PMT and PAT). If processor 60 is successful, it stores the MPEG PSI guide in internal memory and updates the internal database to associate this particular received channel as an MPEG PSI guide type channel (steps 240 and 245 respectively). If acquisition of an MPEG PSI guide was unsuccessful in step 240, processor 60 identifies this particular received channel as being without an associated guide in step 250. Following the update of its internal database in steps 220, 230, 245 or 250, processor 60 repeats the channel scanning process by tuning to receive the next terrestrial broadcast channel in step 205 This iterative process is repeated until all the available terrestrial broadcast channels have been scanned and the process is complete at step 207.

Figure 4 shows a flowchart of an initialization method employed by processor 60 and decoder 100 involving iterative scanning through received cable broadcast channels to associate individual cable broadcast channels with corresponding program guides. Following the start at step 300, processor 60 in step 305 directs system 20 to tune to receive a next available cable broadcast channel using previously stored physical transmission channel (PTC) tuning information. Further, processor 60, in step 310, directs system 20 to attempt to acquire a digital MPEG PSI guide conveyed on this cable broadcast channel. If processor 60 is successful, it stores the MPEG PSI guide in internal memory and updates an internal database to associate this particular received channel as an MPEG PSI guide type channel (steps 315 and 320 respectively). If acquisition of an MPEG PSI guide was unsuccessful in step 315, processor 60 determines if the received broadcast channel is

analog and if so acquires a program guide conveyed in VBI data (if available) in steps 325 and 330 respectively. If the received broadcast channel is not analog (step 325), processor 60 identifies this particular received channel as being without an associated guide in step 335. Following the update of its internal database in steps 320, 330 and 335, processor 60 repeats the channel scanning process by tuning to receive the next cable broadcast channel in step 305. This iterative process is repeated until all the available cable broadcast channels have been scanned and the process is complete at step 307.

Figure 5 shows a flowchart of a method for determining program guide availability on a broadcast channel in response to User entry of a channel identification number or in response to the addition of a new channel to a decoder channel line-up, for example. Following the start at step 400 and in response to User entry of a channel identification number, processor 60 in step 405 determines from its internal database if the User entered identification number corresponds to a previously scanned channel and is associated with an identified program guide. If a program guide is associated with the selected channel and has been previously acquired, processor 60 in step 430 directs system 20 to tune to receive the selected channel using this previously acquired program guide information. If the selected channel is a channel being received for the first time and has no associated program guide information (e.g. a channel being added to a User's channel line-up), processor 60 initiates a program guide availability scan. Processor 60 in step 410, directs system 20 to tune to receive the selected broadcast channel using previously stored physical transmission channel (PTC) tuning information and attempts to acquire a digital PSIP guide conveyed on the selected broadcast channel. If processor 60 is successful, it stores the PSIP guide in internal memory and updates an internal database to associate the selected channel as a PSIP guide type channel (step 415).

In step 430, processor 60 directs system 20 to tune to receive the selected channel using this previously acquired PSIP guide information. If acquisition of a PSIP guide was unsuccessful in step 410, processor 60 determines if the received broadcast channel is analog and if so acquires a program guide conveyed in VBI data (if available) in steps 420 and 425 respectively. Processor 60 directs system 20 to tune to receive the analog channel using pre-stored PTC tuning information in step 430. If the received broadcast channel is not analog (step 420), processor 60 attempts to acquire a digital MPEG PSI guide comprising a program map table and a program association table (PMT and PAT). If processor 60 is successful, it stores the MPEG PSI guide in internal memory, updates the internal database to associate this

particular received channel as an MPEG PSI guide type channel and initiates tuning to receive the selected channel (steps 435, 440 and 430 respectively). If the selected channel was digital and neither PSIP nor MPEG PSI guides were acquired, processor 60 in step 445 initiates repetition of the guide acquisition process from step 410. This iterative process is repeated for a limited number of attempts (e.g. four attempts) or for a limited duration. If, following these attempts, a guide was not acquired, the channel is identified to a User as unobtainable via an on screen message. In certain situations such as during a satellite antenna tuning operation, this process may be set to repeat continuously as part of a channel tuning operation

Figures 6-9 show methods employed by processor 60 for channel number mapping and navigation through channel lists for use in acquiring a User selected channel using different types of pre-stored program guide information. Specifically, Figure 6 shows a flowchart of a method involving channel number mapping for processing program content data and channel identification numbers to provide a composite image for display. In step 505, following the start at step 500, processor 60 searches a previously acquired database of channel information for the available channels. This database information was accumulated during prior channel scanning operations. Processor 60 searches the database to identify a User selected broadcast channel conveying a desired program in response to User entered physical transmission channel (PTC) channel number and either (or both of) a virtual channel major number and a virtual channel minor number. The database associates physical transmission channel (PTC) channel numbers with a virtual channel major number and a virtual channel minor number in a channel map. The channel map advantageously enables identification of a specific broadcast channel conveying a User desired program from entry of a PTC with a minor number or from entry of a major number together with a minor number. In an alternative embodiment, this channel identification number conversion may be performed using a predetermined and stored algorithm or formula. In the event that a User does not enter a minor number a default value of zero is assumed, however, the default minor number is programmable and may be set to another minor channel number. In step 510, processor 60 directs system 20 to tune to receive the User selected broadcast channel identified using its internal database.

In step 515 processor 60 examines its internal database to identify the type of program guide associated with the User selected transmission channel. In the event that more than one guide is available (e.g. both a PSIP and an MPEG PSI guide), processor 60 selects one guide (e.g. a PSIP guide) for use based on a

predetermined guide priority. In step 520, processor 60 in conjunction with demultiplexer 22 of decoder 100, acquires data packets comprising a program conveyed on the User selected broadcast channel. In step 525, processor 60, in conjunction with decoder 100, assembles the acquired packets and processes them to form program images (representing the program being broadcast on the user selected broadcast channel) for display. The program images are advantageously displayed together with the associated PTC number and major and minor numbers on reproduction device 50. The process of Figure 6 terminates at step 530

Figures 7 and 8 show examples of channel selection and decoder tuning based on channel mapping for an MPEG PSI program guide and an ATSC PSIP compatible program guide respectively. The examples show selecting a virtual channel (or sub-channel) and corresponding virtual channel numbers for display when multiple guides and multiple virtual channel identification numbers are being broadcast. Specifically, Figure 7 shows two channel selection examples and uses MPEG PSI guide information conveyed on physical transmission channel 50 with sub-channels 50-1, 50-2, 50-3 and 50-4. In the first example, a User enters the number 50 via remote unit 70 (Figure 1) to select physical transmission channel 50 (e.g. NBC). Note, the User may alternatively select the number 50 by menu item selection in a graphical user interface or use a different data entry device such as a keyboard or discrete switches, for example. Processor 60 (Figure 1) recognizes that an MPEG PSI guide is associated with PTC 50 from its internal database. Further, processor 60 employs the previously stored MPEG PSI guide data in directing system 20 to tune to PTC 50 and to capture, process and display the program images of broadcast channel 50-1 (e.g. the NBC-1 sports sub-channel) identified by default minor number 1. These images are displayed together with the broadcast channel number 50-1. In another embodiment, the channel logo and minor number, e.g. NBC-1 is displayed instead of, or in addition to, the number 50-1.

In the next example in Figure 7, a User enters the numbers 50 and 2 via remote unit 70 (Figure 1) to select a specific broadcast channel being conveyed on physical transmission channel 50. Processor 60 uses previously acquired MPEG PSI data in directing system 20 to tune to PTC 50 and to capture, process and display program data conveyed on this channel. The processed program data is displayed together with the broadcast channel number 50-2 (e.g. NBC-2 movie channel) identified by the User entered minor number 2. These images are displayed together with the broadcast channel number 50-2.

Figure 8 shows four channel selection examples employing ATSC

PSIP guide information conveyed on physical transmission channel 50 with virtual channels 99-0, 99-1, 99-2 and 99-3. It is to be noted that different received program guides support different channel mapping structures. A PSIP guide contains channel map data associating a physical transmission channel (PTC) with a major channel number that is associated with a specific broadcaster. As such a PSIP channel map may associate channel 99 with PTC 50 and information provider (i.e. broadcaster) NBC, for example. Therefore, a decoder may advantageously use this mapping data to display selected channel identification numbers or all the different channel identification numbers as well as the channel logo and minor number, e.g. NBC-1. In contrast, a conventional MPEG PSI guide does not fully support such a mapping.

In the first example in Figure 8, a User enters the number 50 via remote unit 70 (Figure 1) to select physical transmission channel 50 (e.g. NBC). Processor 60 recognizes that an ATSC PSIP guide is associated with PTC 50 from its internal database. Further, processor 60 employs previously acquired PSIP guide data in directing system 20 to tune to PTC 50 and to capture, process and display a program conveyed on PTC 50 equivalent to virtual channel 99-0 identified by default minor number 0. Note, a different default minor number may be used to identify a particular broadcast channel in one guide channel mapping system (e.g. a PSIP guide system) than in a different guide channel mapping system (e.g. an MPEG PSI guide system). The processed program is displayed together with the broadcast channel number 99-0 derived from the PSIP channel map.

The next example of Figure 8 differs from the first described example in that the User enters minor number 2 as well as PTC number 50. System 20 and processor 60 apply both of these numbers in determining from the previously acquired PSIP channel map that system 20 is to tune to PTC 50 to acquire a program on virtual channel number 99-2 for display together with channel number 99-2.

In the next example of Figure 8, the User enters broadcast channel number 99. System 20 and processor 60 determines from the previously acquired PSIP channel map that channel 99 maps to PTC 50 and system 20 tunes to PTC 50 to acquire a program on default broadcast channel number 99-0 for display together with the identification number 99-0. Note, default minor number for channel 99 is 0.

The last example of Figure 8 differs from the previous described example in that the User enters minor number 2 as well as virtual broadcast channel number 99. System 20 and processor 60 apply both of these numbers in determining from the previously acquired PSIP channel map that system 20 is to tune to PTC 50 to acquire a program on broadcast channel number 99-2 for display together with

channel number 99-2.

Figure 9 shows a flowchart of a method for use by processor 60 and system 20 (Figure 1) in acquiring program content data in response to User channel selection via navigation through hierarchically associated broadcast channel lists. Figure 10 shows an exemplary program guide display including hierarchically associated channel lists and associated menu navigation controls. In step 805 of Figure 9, following the start at step 800, processor 60 directs system 20 to navigate through a first list of broadcast channels in response to User activation of a first navigation control in order to select a broadcast channel identified by a virtual channel number. Such a list of channels may take the form of a program guide channel list exemplified by virtual channel numbers 107-111 (A&E, NBC etc.) in the left column of Figure 10. Further, the first navigation control may be any form of User interface control such as a channel increment or decrement button on remote unit 70 (Figure 1) or a cursor based control involving activation of icon 957 of Figure 10, for example, or some other form of control. Upon selection or highlighting of the desired broadcast channel identified by a virtual channel number e.g. NBC channel 108 (item 905 Figure 10) the corresponding physical transmission channel number is displayed e.g. PTC 50 for channel 108 (item 910 Figure 10). In addition, the corresponding sub-channels available for channel 108 including channels 108-0, 108-1, and 108-2 in this example, are displayed in a hierarchically arranged sub-menu (menu 930 of Figure 10).

In step 810 of Figure 9, processor 60 directs system 20 to navigate through the second list of broadcast sub-channels (menu 930) hierarchically associated with the selected broadcast channel in response to User activation of a second navigation control. This is done in order to select a desired sub-channel, identified by a virtual channel minor number, for viewing or recording, for example. In exemplary Figure 10, the second list comprises sub-channels 108-0, 108-1, 108-2 (items 915, 920 and 925) hierarchically displayed for selected broadcast channel 108. The second navigation control, like the first navigation control, may be any form of User interface control such as a channel increment or decrement button on remote unit 70 (Figure 1) or a cursor based control involving activation of icon 940 of Figure 10, for example, or some other form of control.

In step 815 of Figure 9, processor 60 directs system 20 to tune to receive the channel conveying data comprising a program on the sub-channel selected in step 810. Processor 60 employs previously acquired program guide information including tuning information associated with the selected sub-channel stored in its

The state of the s

internal database in configuring system 20 to tune to receive the selected sub-channel. In step 820, processor 60 directs system 20 in the capture and assembly of packetized data to form the program being broadcast on the user selected sub-channel. The process of Figure 9 terminates at step 825.

The architecture of Figure 1 is not exclusive. Other architectures may be derived in accordance with the principles of the invention to accomplish the same objectives. Further, the functions of the elements of system 20 of Figure 1 and the process steps of Figures 2-9 may be implemented in whole or in part within the programmed instructions of a microprocessor. In addition, the principles of the invention apply to any form of analog or digital program specific (and program guide) information (including non-MPEG compatible program guide information).

What is claimed is:

1 In a video decoder, a system for acquiring packetized program information comprising a program conveyed on one of a plurality of broadcast channels, comprising the steps of:

identifying an individual broadcast channel of said plurality of broadcast channels in response to user entry of either of, (a) a first channel identification number and (b) a different second channel identification number:

tuning to receive said identified individual broadcast channel;

acquiring packetized program information comprising a program conveyed on said individual broadcast channel using an acquired program guide; and processing said packetized program information to be suitable for display.

## 2. A system according to claim 1, wherein

said first channel identification number is a transmission channel identification number, and

said second channel identification number is a virtual channel identification number.

- 3. A system according to claim 2, including the step of displaying said second channel identification number together with said program, in response to entry of said first channel identification number.
- 4. A system according to claim 1, wherein said second channel identification number is comprised of two elements, a major number and a minor number.
- 5. A system according to claim 4, including the step of displaying said major number and minor number together with said program, in response to entry of said first channel identification number.
- 6. A system according to claim 2, including the step of displaying said first channel identification number together with said program in response to entry of said second channel identification number.

## 7 A system according to claim 1, wherein

said second channel identification number is comprised of two elements, a major number and a minor number, and in absence of user entry of said minor number a default minor number is used

# 8. A system according to claim 1, wherein

said second channel identification number comprises a major number and a minor number, wherein

said major number is associated with both an information provider and a group of sub-channels, and

said minor number identifies a sub-channel from among said group of sub-channels.

## 9. A system according to claim 8, wherein

said first channel identification number is a transmission channel identification number, and

said tuning step includes tuning to receive a sub-channel comprising said identified individual broadcast channel in response to user entry of said transmission channel identification number and said minor number.

## 10 A system according to claim 1, wherein

in said identifying step said individual broadcast channel is identified using acquired program guide information.

## 11. A system according to claim 1, including the step of

searching a database to identify an individual broadcast channel of said plurality of broadcast channels in response to user entry of either of, said first channel identification number and said different second channel identification number.

12. In a video decoder, a system for acquiring packetized program information comprising a program conveyed on one of a plurality of broadcast channels, comprising the steps of:

acquiring a program guide containing information mapping a first broadcast channel number to a different second channel number, said acquired program guide being one of a plurality of different available program guides including a program guide omitting said mapping information,

tuning to receive said second channel in response to user entry of said first broadcast channel number using said acquired program guide;

acquiring packetized program information comprising a program conveyed on said second channel.

# 13. A system according to claim 12, wherein

said first broadcast channel number is a virtual channel identification number, and

said second channel identification number is a transmission channel identification number.

# 14. A system according to claim 12, wherein

said first broadcast channel number is comprised of two elements, a major number and a minor number.

### 15. A system according to claim 12, wherein

said first broadcast channel number is comprised of two elements, a major number and a minor number, and in absence of user entry of said minor number, a default minor number is used.

16. A system according to claim 14, wherein said major number is associated with a broadcast information provider.

17. A system according to claim 12, including the step of selecting said program guide containing mapping information from said plurality of different available program guides including said program guide omitting said mapping information. 18. A system according to claim 12, including the step of

displaying at least one of, (a) said first broadcast channel number, and (b) said second channel number, together with said program, in response to user entry of said first broadcast channel number.

## 19. A system according to claim 18, wherein

said first broadcast channel number comprises a major number and a minor number, wherein

said major number is associated with both an information provider and a group of sub-channels, and

said minor number identifies a sub-channel from among said group of sub-channels.

# 20 A system according to claim 12, wherein

said first broadcast channel number comprises a major number and a minor number, wherein

said major number is associated with both an information provider and a group of sub-channels, and

said minor number identifies a sub-channel from among said group of sub-channels, and

said second channel number is a transmission channel identification number, and

said tuning step includes tuning to receive a sub-channel comprising said second channel in response to user entry of said transmission channel identification number and said minor number.

21. In a video decoder, a system for acquiring packetized program information comprising a program conveyed on one of a plurality of broadcast channels, comprising the steps of:

receiving at least one of, (a) a virtual channel identification number and (b) a transmission channel identification number, said transmission channel conveying packetized program information comprising a program;

mapping said virtual channel number to said transmission channel identification number;

tuning to receive said transmission channel using said transmission channel identification number in response to user entry of either one of, said virtual channel identification number, and said transmission channel identification number; and

acquiring said packetized program information comprising said program conveyed on said transmission channel.

# 22. A system according to claim 21, including the step of

displaying at least one of, (a) said virtual channel identification number, and (b) said transmission channel identification number, together with said program, in response to user entry of said first broadcast channel number.

### 23. A system according to claim 22, wherein

said virtual channel identification number comprises a major number and a minor number, wherein

said major number is associated with an information provider and a group of sub-channels, and

said minor number identifies a sub-channel from among said group of sub-channels.

24 In a video decoder, a system for tuning to acquire packetized program information comprising a program conveyed on one of a plurality of broadcast channels identified by a virtual channel identification number including a major number associated with an information provider and a group of sub-channels and a minor number identifying a sub-channel from among said group of sub-channels, comprising the steps of:

navigating within a first list, including a plurality of broadcast channels, to identify and select a broadcast channel and an associated virtual channel identification number, in response to user activation of a first navigation control;

navigating within a second list of a group of sub-channels associated with said selected broadcast channel to identify and select a sub-channel and an associated minor number, in response to user activation of a second navigation control:

tuning to receive a selected broadcast channel using said selected virtual channel identification number; and

acquiring packetized program information comprising a program conveyed on said broadcast sub-channel using said minor number.

## 25. A system according to claim 24, wherein

said first navigation control comprises a control for incrementally or decrementally traversing through numbered broadcast channels, and

said second navigation control comprises a control for incrementally or decrementally traversing through numbered sub-channels.

## 26. A system according to claim 24, wherein

said first and second navigation controls use the same user activated remote control unit button.

# 27. A system according to claim 24, wherein

said first and second navigation controls use different user activated remote control unit buttons

28 A system according to claim 24, wherein

said first navigation control comprises a control for incrementally or decrementally traversing through a displayed menu listing numbered broadcast channels, and

said second navigation control comprises a control for incrementally or decrementally traversing through a displayed menu listing numbered sub-channels.


29. A system according to claim 24, including the steps of generating a displayed menu listing numbered broadcast channels incrementally or decrementally traversed in response to said first navigation control, and


generating a displayed menu listing numbered sub-channels incrementally or decrementally traversed in response to said second navigation control.


23


### Abstract


A system for acquiring program guide information conveyed on one of a plurality of broadcast channels involves identifying an individual broadcast channel in response to user entry of either of, (a) a first channel identification number (e.g. a virtual channel identification number) and (b) a different second channel identification number (e.g. a transmission channel identification number). The system is tuned to receive the identified individual broadcast channel and packetized program information is acquired comprising a program conveyed on the individual broadcast channel using an acquired program guide. The packetized program information is processed to be suitable for display. The system also supports navigating within a first list of broadcast channels and a second list of sub-channels associated with individual broadcast channels in response to user activation of first and second navigation controls respectively.

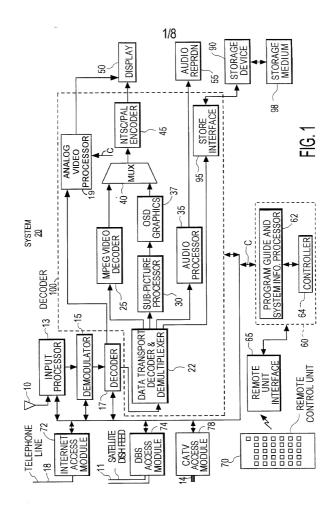


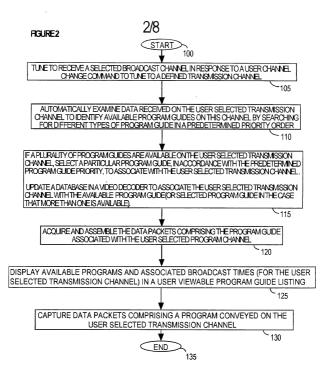

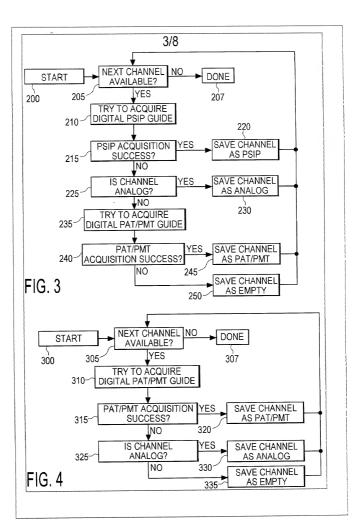

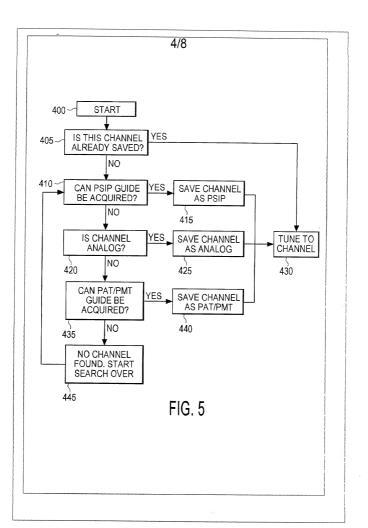



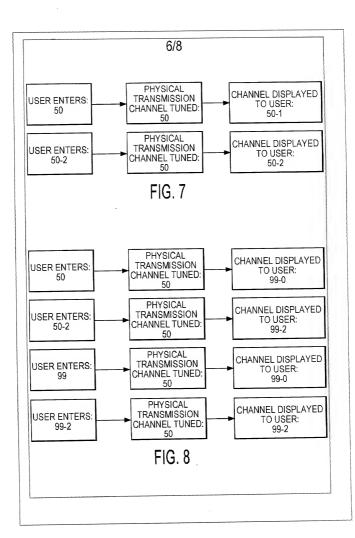





FIGURE 10

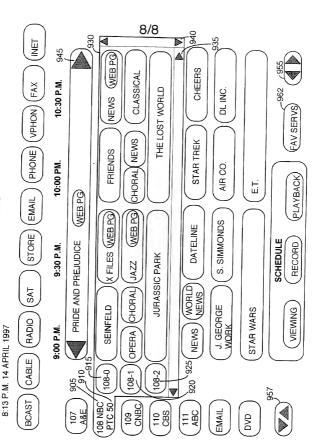

Post Office Address Pesidence

#### DECLARATION AND POWERS OF ATTORNEY

As a below named inventor. I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled A SYSTEM FOR ACQUIRING AND PROCESSING BROADCAST PROGRAMS, PROGRAM GUIDE AND CHANNEL IDENTIFICATION DATA the specification of which was filed on HEREWITH As Application Serial No. and was amended on , or, if not identified here by filing date and serial number, is attached hereto. I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. Lacknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56. Thereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate by me or my representatives or assigns for this invention having a filing date before that of the application on which priority is claimed. Application No. \_\_\_ \_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_ priority claimed () Yes () No Application No. \_\_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_\_priority claimed () Yes () No \_ priority claimed () Yes () No in \_\_ on \_\_ Application No. \_ Application No. 60/135.857 Filed May 25, 1999 Filed Application No. \_\_\_ I hereby claim the benefit under 35 USC 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, Lacknowledge the duty to disclose material information as defined in 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application Serial No.\_\_\_\_\_ Filed \_\_\_\_\_ () patented () pending () abandoned Filed \_\_\_ () patented () pending () abandoned hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and The like so made are punishable by fine or imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. I hereby appoint, individually and collectively, the following as my/our attorney or agent with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Registration No. 26,040

Registration No. 26,932

Registration No. 40,425 \_ and Joseph S. Tripoli Ronald H. Kurdyla and \_ and Alexander J. Burke Registration No. PLEASE ADDRESS ALL COMMUNICATIONS TO: JOSEPH S. TRIPOLI PATENT OPERATIONS THOMSON MULTIMEDIA LICENSING INC. P. O. Box 5312 PRINCETON, NEW JERSEY 08543-5312 SCOTT E. KLOPFENSTEIN 1 below tim Soft Edward Inventor (1) (Signature in Full. No initials.) (Type or Print) Citizenship USA 2/7/00 Date Post Office Address 9304 F Viking Hills Ct., Indianapolis, Indiana 46250 7419 Wood Ct., Fishers, IN 4603 8 Indianapolis (Marion County), Indiana 46250 Residence Fishers (Hamilton County), Indiana 46038 SEK Inventor (2) (Type or Print) (Signature in Full. No initials.) Citizenship Post Office Address Residence Sale or Joint inventor (3) (Type or Print) (Signature in Full, No initiols.) Citizenship